



# Absolute Rotary Encoders

## Overview

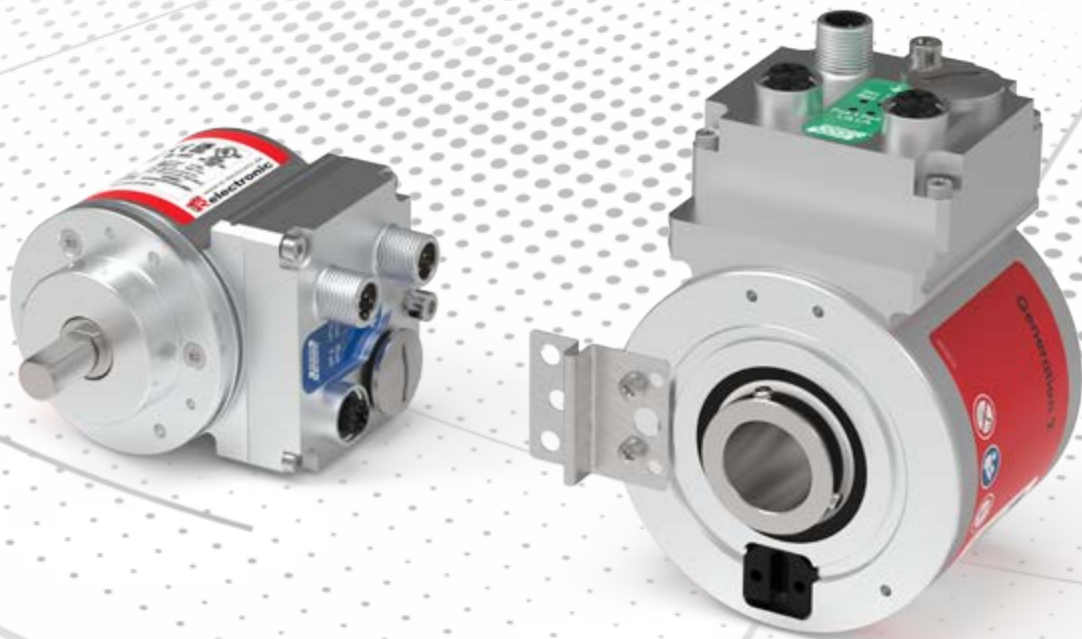


# Absolute Rotary Encoders

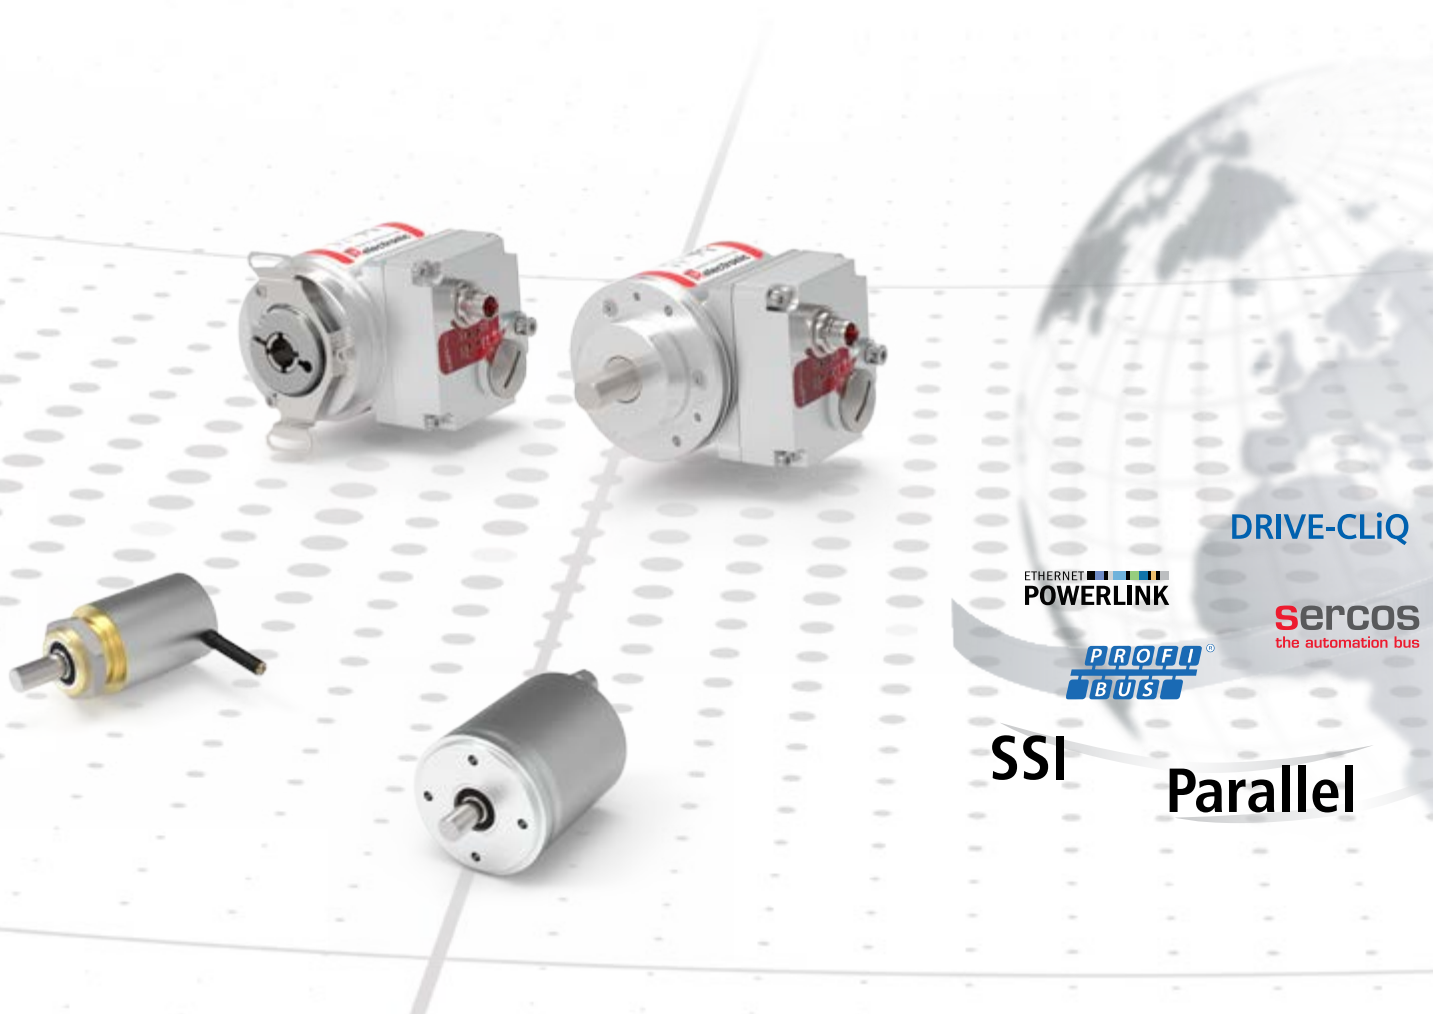

## Rotary encoders for industrial applications

TR-Electronic rotary encoders with optical or magnetic scanning precisely acquire position in steel production, wind power plants, cranes and ships as well as in explosion-proof versions in painting lines. Miniature versions ensure the correct position in medical technology and SIL-approved absolute rotary encoders ensure the necessary safety.


In addition to high-quality rotary encoders for almost every application, we also offer extensive accessories such as programming tools, displays and assembly components for quick and simple implementation and seamless integration into your processes.

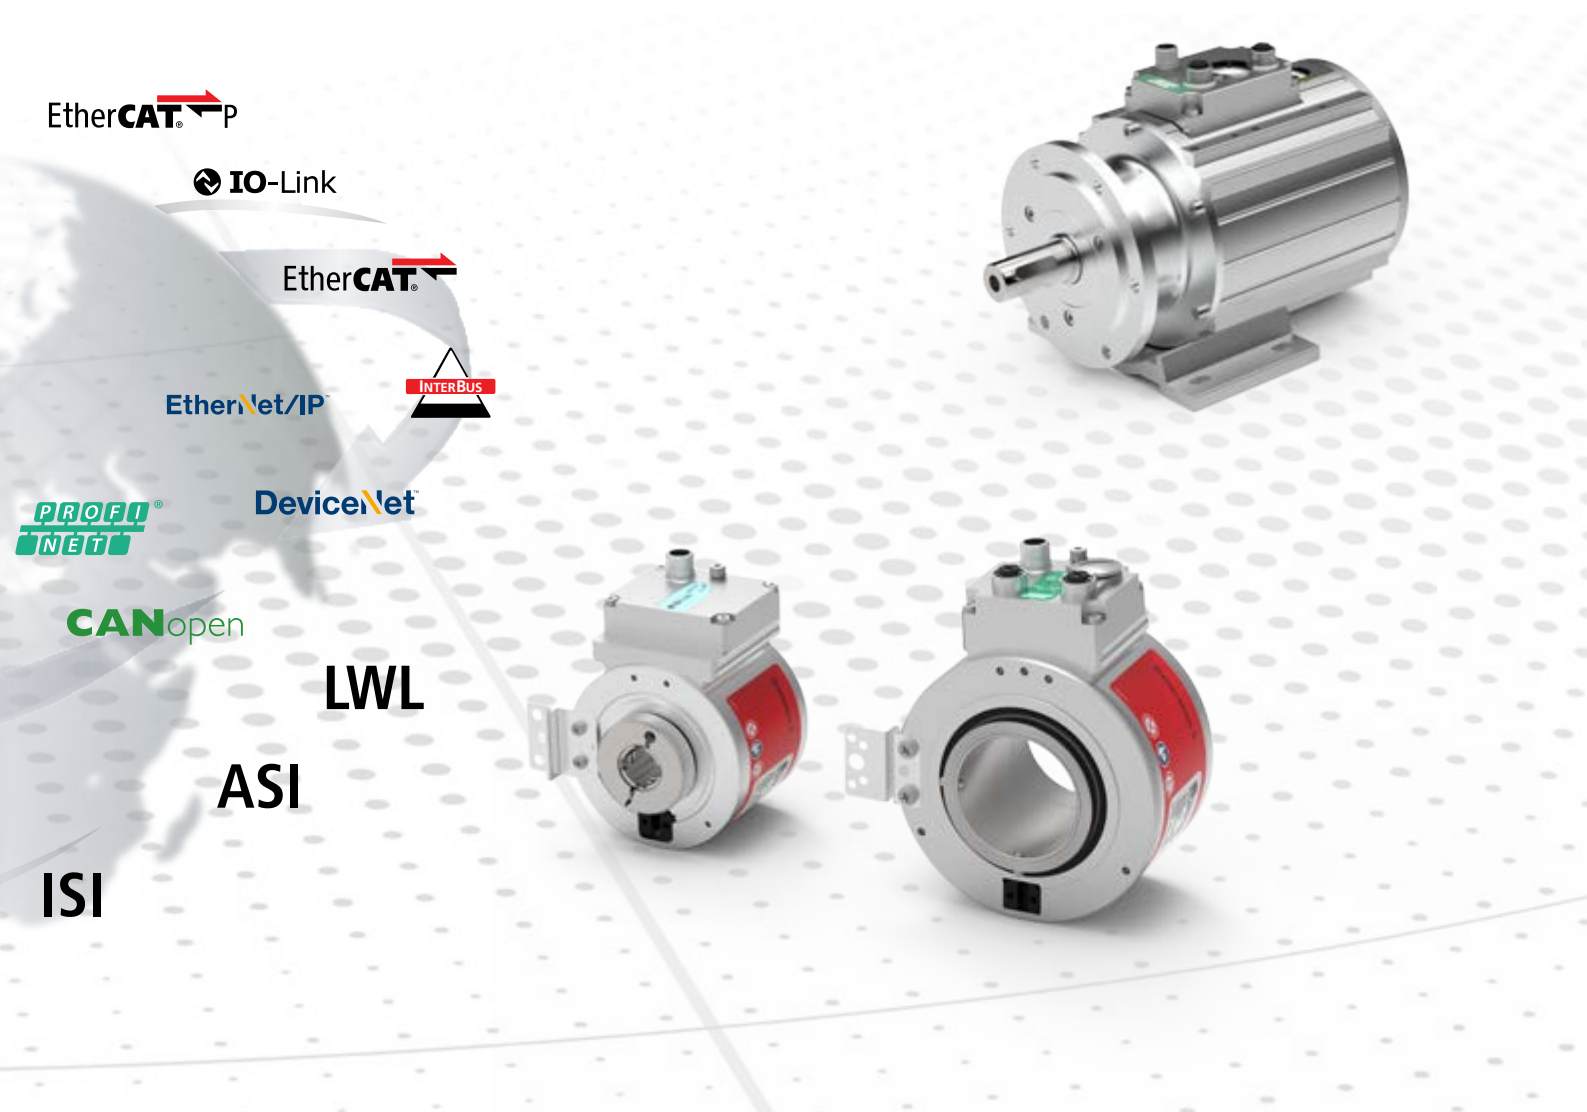

## Content

Technical Information .....	4	- C_H80 .....	26
Families by Size .....	12	- Q_H80/81 .....	30
- C__22 .....	12	- C__84 .....	34
- C__36 .....	14	- C_H110 .....	36
- C__582 .....	18	- C_V115 .....	40
- C__65 .....	22	- MG - Position indicators .....	42

## Scanning – Optical and magnetic

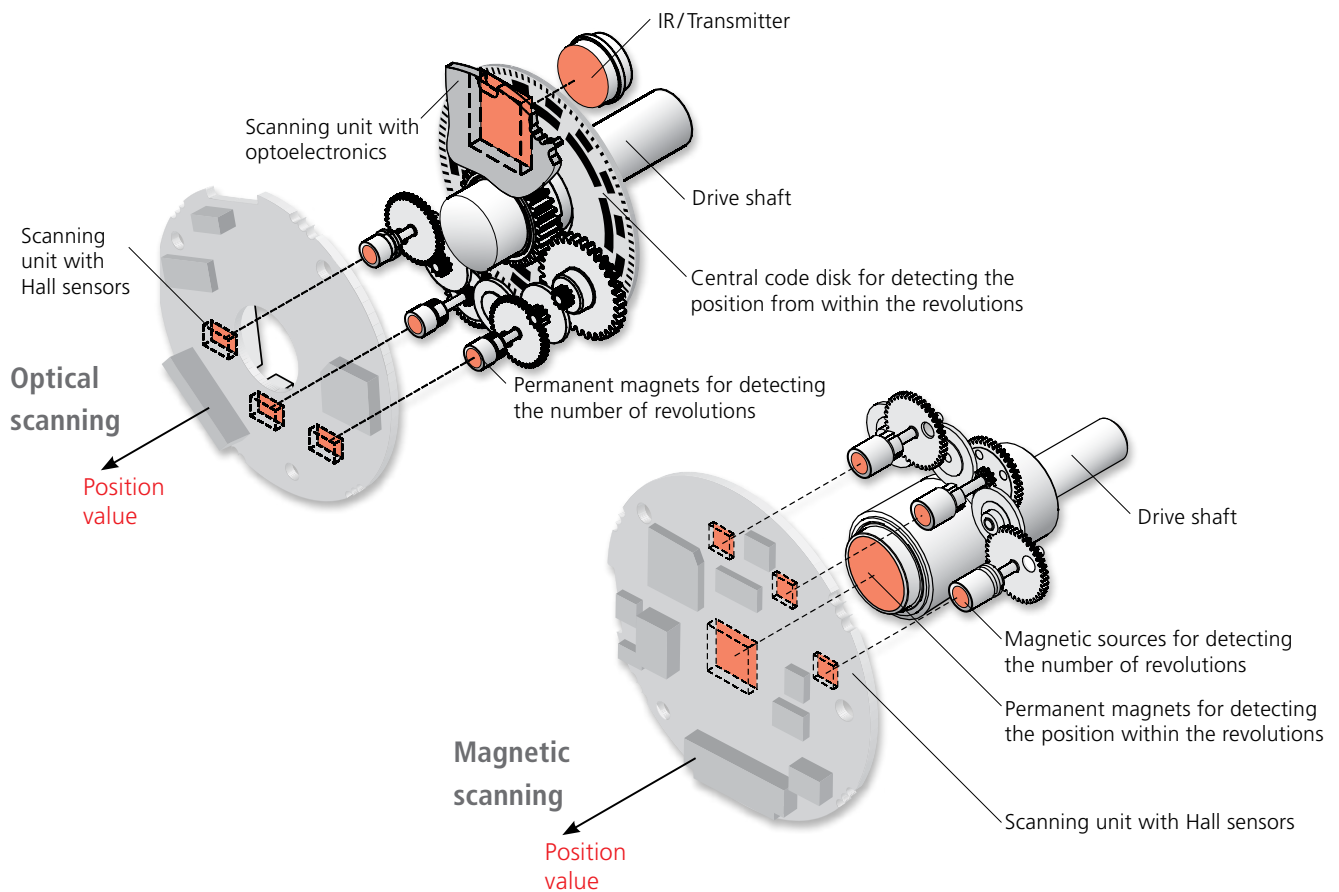

### Three detections for perfect cost-benefit ratio

#### **O** High-resolution optical scanning

Thanks to modern Opto-Asic technology, up to 18 bits (262,144 steps) can be generated within a single revolution. This is supplemented with up to 4,096 absolute scanned revolutions. Signal processing occurs at FPGA speed. This type of scanning is always used whenever position values need to be captured very quickly and with high resolution. This type of scanning is denoted by the letter "O" in the type designation.

#### **E** Optical scanning for standard applications

The majority of industrial applications use rotary encoders with a resolution of up to 15 bits per revolution and up to 4,096/256,000 scanned revolutions. Signal processing within the processor enables multiple evaluation functions and

optimal adjustment to new requirements. Signals such as limit switches and speed monitoring can also be generated. This type of scanning is denoted by the letter "E" in the type designation.

#### **M** Magnetic scanning for price-sensitive applications

Price-conscious, magnetic rotary encoders are the first choice for applications with lesser requirements in terms of accuracy, resolution and timing. The resolution of a revolution is 11 bits and this is supplemented with 4,096 absolute scanned revolutions. There is no extended signal processing, though the resolution of this device is programmable. This type of scanning is denoted by the letter "M" in the type designation.



## Shaft types

Solid shaft



Blind shaft



Hollow shaft




### Persistent machine concept

The 58 mm series of the compact rotary encoder was developed for diverse mounting variations. Therefore, there will always be a fitting device for any installation situation that should arise. Functions that you need with a solid shaft, are also available with a hollow shaft. Our rotary encoders with solid shaft are available with many coupling options for easy integration.

The variety of mechanical solutions enhances your room for innovative constructions. You will find a sample of the numerous mounting possibilities in the following overview.

Important: not all possible combinations will be shown.

## C\_\_582 – the next generation: Standard size with outstanding features

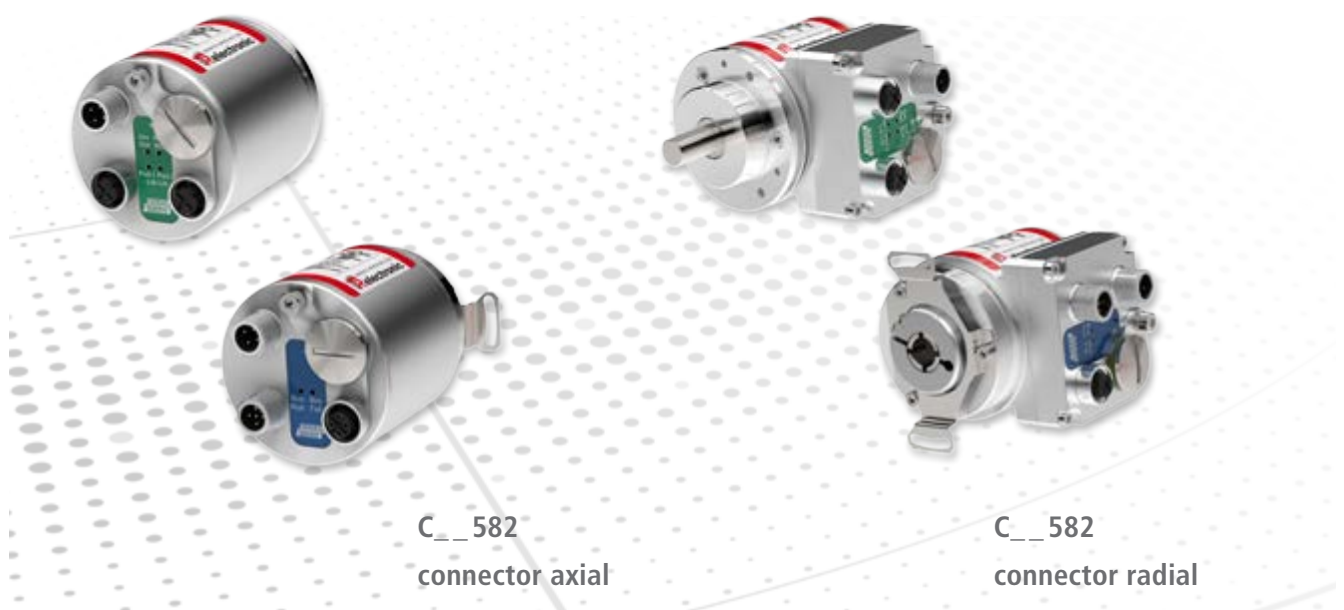

### **\_ Efficient design**

Everything the application needs – reduce to the max.

### **\_ Robust magnetic multiturn rotary encoder CM\_582**

13 bit resolution within one revolution (singleturn)  
12 bit revolutions (multiturn), optionally 16 bit.  
Output up to 256,000 revolutions.

### **\_ Servo flange, clamping flange Slip-on hollow shaft up to 15 mm**

Plenty of shaft diameters, flanges and torque supports  
make the magnetic encoders CM\_582 fit into the mechanic  
surroundings of many applications.

### **\_ Precise optical multiturn encoder CE\_582, CO\_582**

15 or 18 bit resolution in one revolution (singleturn)  
12 bit revolutions (multiturn), optionally 16 bit.  
Output of up to 256,000 revolutions."

### **\_ Servo flange, clamping flange Slip-on hollow shaft up to 15 mm Hollow-through-shaft up to 15 mm**

CE\_582 and CO\_582 add hollow-through shafts with  
diameters up to 15 mm to the standard range of solid  
and slip-on blind shafts and flanges.

### **\_ Connectors axial or radial**

Mounting space is valuable. Do not let cabling interfere with  
other parts and components.  
For solid and slip-on shafts (blind shaft), you can choose  
between connectors axial (at the side opposite to the shaft)  
or radial (at the side of the encoder housing).



**\_ Parameterizable gearbox**

Fractional gearbox parameters (numerator/denominator) for almost any reproduction of gearbox factors.  
Also for exact detection of closed rotary axes.

**\_ Latest communication standards for Industry 4.0**

The new C\_\_582 generation of industrial standard rotary encoders is rigorously equipped with state-of-the-art chip families.

**\_ Easy installation with open configuration options**

TR absolute rotary encoders fulfill the standards of the respective user organizations for parameterization. Users can thus navigate the standard parameters without difficulty. The free configuration also offers easy access to all functions which are available in addition to the standard functions.

**\_ Alarms and diagnostics**

How's about my machine? To know that at any time is one of the core aspects of industry 4.0.  
Be it capacity utilisation or upcoming services: C\_\_582 provides all necessary alarms and diagnostic messages for long term machine and plant surveillance.

**\_ "On the fly" preset for adjustment during the process**

Preset values are transmitted via the real-time capable process image area. This means that absolute adjustments (also called "preset" or "offset adjustment") can be performed synchronously with the control cycle even while the system is in operation. No more axis stops necessary.

**\_ Update time <1 ms**

Suitable for quick position control with less than 1 ms encoder actual value updating for the bus output.

**\_ Speed output with adjustable averaging**

The time base for the speed evaluation can be freely set within a range of one millisecond to one second and can also be scaled in any units.



### **\_ Free mapping of process data in Ethernet Telegram**

For EtherCAT, the transmitted telegram can be freely designed to meet the programmers needs. Choose free from current reading position, speed, warnings, alarms, software-cams ... what is needed for your process / your control architecture.

### **\_ Software-Cams**

Since industrial revolution, cams were a propriate way to control automated processes. At first with mechanical camshafts and then with electromechanic cam switches. Now, cam signals are calculated in the central control - or, even more comfortable – directly in C\_\_582 ETC. Cam signals are mapped arbitrarily into the process data channel and are available to other bus nodes.

### **\_ Distributed Clocks down to 100 µs cycle time**

For precise position and path control of moving axes, all sensors and actors involved must be synchronized. With EtherCAT, this is achieved by distributed clocks. The smallest possible cycle time in C\_\_582 is 100 µs.



### **\_ Firmware Update via TCP/IP**

Computer and smartphones are the role model: New functionality by new firmware. New firmware for C\_\_582 EIP can be loaded via the asynchronous TCP/IP-cannel. Existing hardware is future-proof and can be equipped even for new applications.

### **\_ Device Level Ring DLR**

A ring makes the network safe. Similar to MRP with PROFINET, DLR provides higher availability to machines and plants with Ethernet/IP. With one additional connection from the last encoder in a branch back to the switch, connection is closed to a ring with much higher reliability. Break in signal transmission is detected at once and bypassed. A single cable break this does not lead to failure of all nodes behind the break in a branch.



### **\_ Encoderprofile**

C\_\_582 EPN consequently supports the EPN-Encoder profile of Profibus International standardisation organisation.

### **\_ Profinet with IRT**

The PROFINET variant therefore uses cutting-edge technology with long-term availability and is absolutely compliant with the latest standards of the PI User Organization. Real-time synchronization (IRT) enables precisely synchronized positioning of several axes.

### **\_ Neighborhood detection**

With neighborhood detection, you exchange devices without the use of an engineering tool. An encoder that is connected newly to the network can determine his position and function in the network by help of his physical neighbours and then requests the parameter data for this function from the master control.

### **\_ Fast Startup for quick system availability**

C\_\_582 PROFINET starts faster than any other bus rotary encoder. Once configured a stable, valid absolute position value is available in the PROFINET control just a few instants after restoration of supply. System startup is greatly accelerated and modular machine concepts in particular (with periodically decoupled modules) benefit directly from this technology.\*

### **\_ Media-Redundancy Protocol for highest reliability**

One ring for reliability. The PROFINET interface of the C\_\_582 supports the innovative Media Redundancy Protocol MRP. Normally PROFINET only supports a linear/tree structure. A redundant connection is not primarily provided as standard. MRP significantly increases availability with one simple device! Branches are connected to a ring with an additional line from the last node to the next switch. The appropriately configured nodes detect this. One of the nodes now disconnects this ring, by "ignoring" the second connection. If a connection fails (due to cable breakage or failure of a node), the nodes detect this and attempt to find another way to the rest of the system. The previously opened connection is now closed and all nodes are reconnected to the network.\*

\*An encoder can either be configured for Fast Startup or for MRP.





- \_ Low connection costs:**  
**M12, 4-pin, A-coded, without shield,**  
**supply and data in one cable.**
- \_ Cyclical transfer:**  
**Position, speed, 2 independent**  
**position limit switches, speed monitor.**
- \_ Transferred parameters can be configured.**
- \_ Cycle time for cyclical transfer  $\geq 1$  ms.**
- \_ Acyclical transfer:**  
**Error messages, operating hours.**
- \_ Hardware switching output programmable:**  
**Either speed monitor, limit switches ...**

An IO-Link master is often already present in a machine, usually to read in and parameterize initiators. TR-Electronic rotary encoders with IO-Link use exactly this infrastructure to communicate with the control.

If a machine or system already has IO-Link integrated as a bus system, the obvious approach is to also control absolute rotary encoders with this bus system. The actual value communication uses a star distribution system between rotary encoder and the next distribution node and is compatible with normal, digital initiator communication.

The zero position of the rotary encoder is conveniently adjusted via IO-Link and the usual bus parameterization tools – without turning the encoder itself.

This makes installation child's play. The transferred parameters can also be selected at the same time.

Machine condition monitoring made easy: Important status information is transferred via the acyclical services.

C\_ \_582 with IO-Link enables internal states to be converted into programmable switching states of the digital output. This enables simple implementation of e.g. speed monitoring, position limit value monitoring, limit switches and much more. The rotary encoder reacts to exceeding of a speed range, for example, through a digital signal like a normal initiator and can also send status messages to a very simple electronic analysis module.



**\_ The direct route for mounted encoders to SINAMICS® drives.**

DRIVE-CLiQ is the open system interface for position sensors for the SINAMICS® drive family from Siemens AG for motion control. This fast absolute encoder interface connects the converter centrally installed in the switch cabinet to the rotary encoders and position sensors directly on the respective axes.

**\_ Direct position measurement without gear backlash**

For increased reliability and precision, it may be desirable not only to use the encoder in the motor for position control. Encoders mounted directly on the axis to be measured eliminate the uncertainties caused by gear backlash.

**\_ Reliability through redundancy**


Mounted encoders used in conjunction with motor-integrated systems can reliably detect slipping of connections or even shaft/gear breakage.

**\_ All mechanical variants of Generation 2**

The C\_\_582s from TR-Electronic are available with the DRIVE-CLiQ interface.

The design engineers thus have access to the entire mechanical diversity of the modular system with full integration into the SINAMICS® drive technology family.

## Encoder - Family C\_\_22 - Housing 22 mm

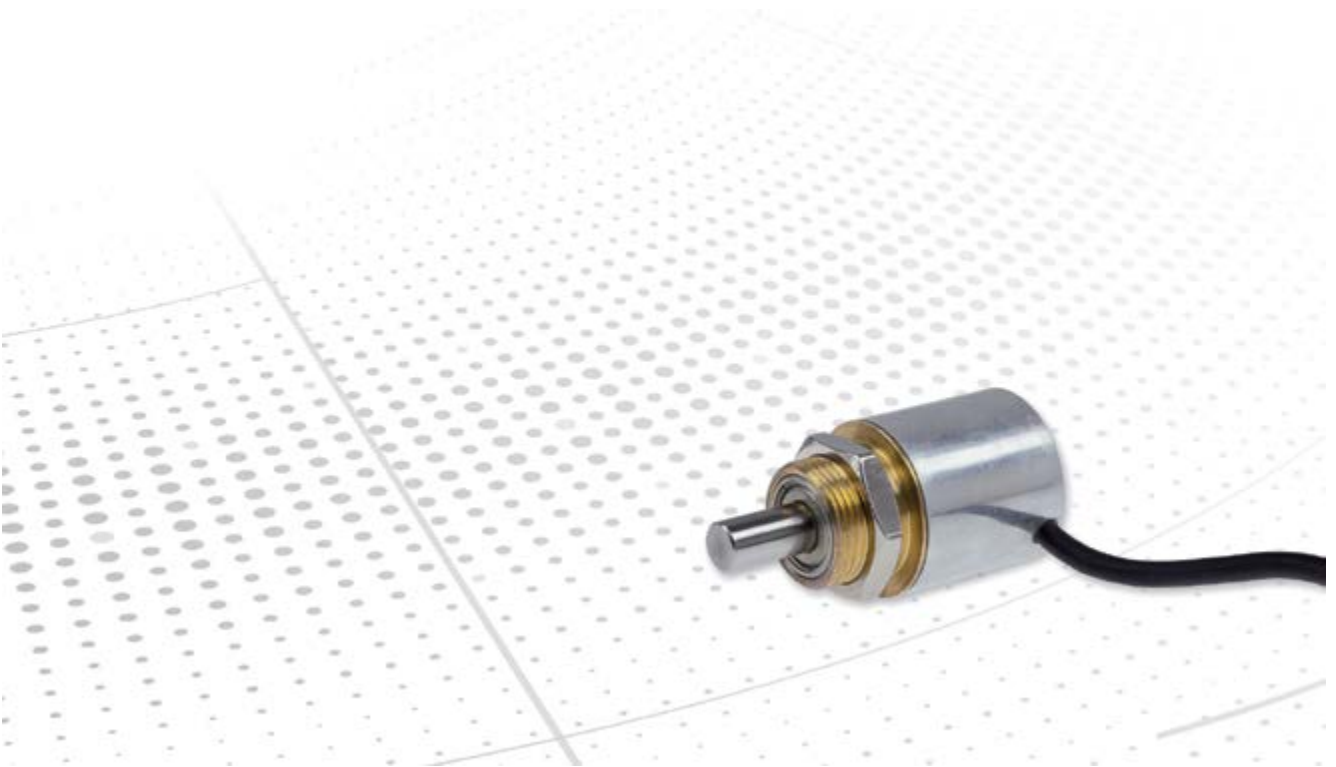





### Tiny but an absolutely real encoder!

Within the CMV 22 M we have combined our innovative ideas of rotary encoder technology and the experience gained over the years and placed it into a miniature rotary encoder. With a 22 mm diameter, it is the smallest absolute multi-turn rotary encoder of its kind. Amazingly compact, it can be easily mounted in the most confined machine spaces. The contact-free detection guarantees shock and vibration resistance which combined with its low mass make it perfect for use in demanding environments.

#### **Application**


Direct installation into servo drives for wear-free, absolute position detection over several revolutions. The small size of 22 mm enables real multi-turn position measuring without battery back-up in fields such as apparatus construction and medical engineering, where up till now only incremental rotary encoders or multiple-ganged potentiometers were used.

## Magnet detection (M)

Products	CMV22M	CMV22M
		
Detection	Magnet detection (M)	Magnet detection (M)
Single / multi	(M) Multi	(M) Multi
Supply	7...26 VDC	14...30 VDC
Steps per turn	4096	4096
Number of turns	265	4096
Precision	$\pm 1,0^\circ$	$\pm 1,0^\circ$
Shaft diameters available	3mm, 6mm, 1/4"	3mm, 6mm, 1/4"
Connectors	Cable outlet radial	Cable outlet radial
Ambient temperature	0...+60 °C	0...+60 °C
Protection class	IP64	IP64
Interface	<b>SSI</b> <b>ASI</b>	<b>Analog</b>
Weblink	<a href="http://www.tr-electronic.com/s/S007235">www.tr-electronic.com/s/S007235</a>	<a href="http://www.tr-electronic.com/s/S007234">www.tr-electronic.com/s/S007234</a>
QR-Code		

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Rotary Encoder - Family C\_\_36 - Housing 36 mm

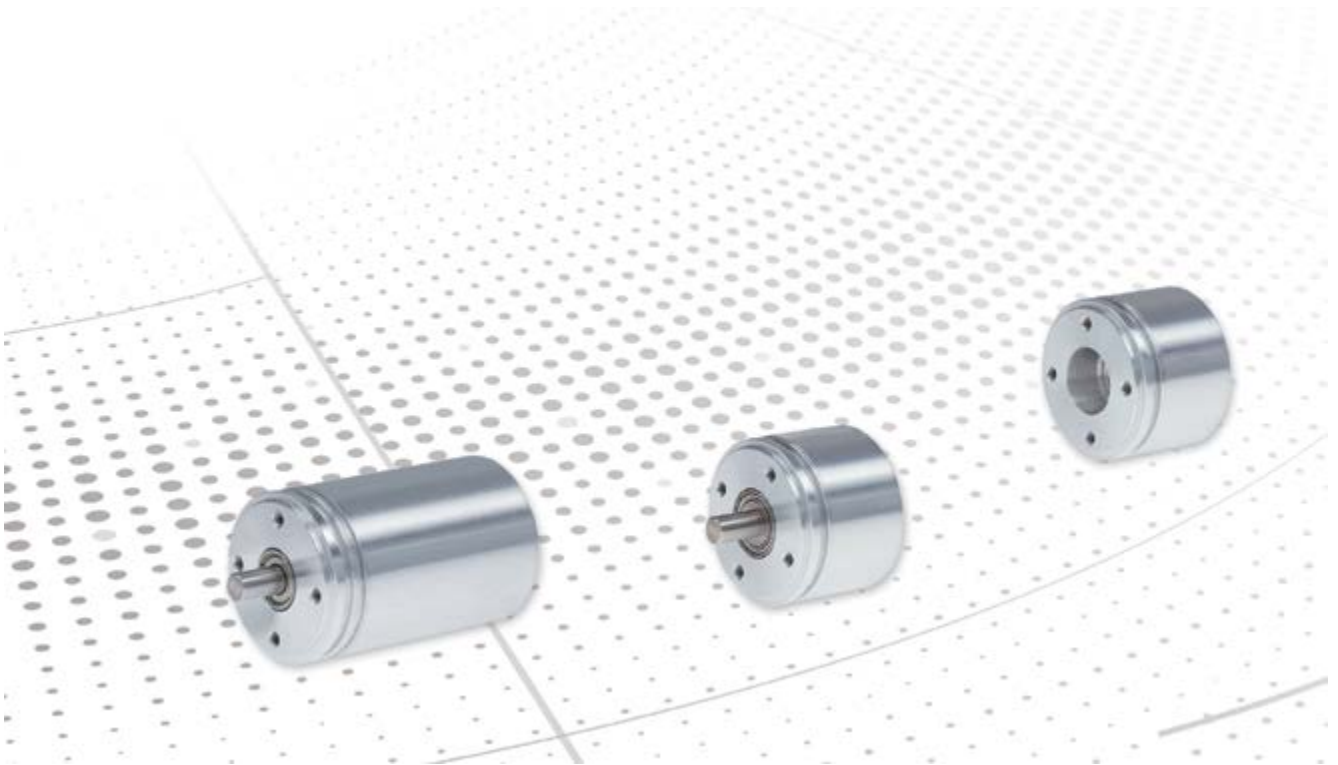




### Compact absolute rotary encoder family - also washdown safe (IP69K)

A new design size is taking the market by storm: with a diameter of 36 mm, advanced encoder technology is moving in where there is no room for typical industrial design sizes. And there is absolutely no need for the 36 mm series of encoders from TR to hide behind the bigger design sizes. The series is made up of incremental, single and real multi-turn rotary encoders, some with single-scan, some with double-scan functionality, and implemented according to the redundancy concept from the gears to the scan, power supply and interface. Compact encoders C\_\_36 are available with magnetic and optic detection with up to 18 bit resolution per revolution.



## Magnet detection (M)

Products	CMV36-S	CMV36-S+FS	CMV36-M
			
Detection	Magnet detection (M)	Magnet detection (M)	Magnet detection (M)
Single / multi	(S) Single	(S) Single	(M) Multi
Supply	11...27 VDC	11...27 VDC	11...27 VDC
Steps per turn	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*	4096	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*
Number of turns	1	1	4,096 (option: 16,777,216)
Shaft diameters available	6mm	6mm	6mm
Connectors	Cable gland axial	Cable gland axial	Cable gland axial, M12 axial (DRIVE CLiQ)
Maximum SIL/PL		SIL2/PLd	
Ambient temperature	-25...+70°C	-25...+70°C	-25...+70°C
Protection class	IP65 (option IP69k)	IP65 (option IP69k)	IP54 (option IP65)
Interface	<b>SSI</b> <b>ASI</b> <b>Analog</b> <b>CAN</b>	<b>Analog</b>	<b>SSI</b>  <b>ASI</b> <b>CAN</b>
Option, additional interfaces (on request)	<b>INC</b>	<b>INC</b>	<b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S007174">www.tr-electronic.com/s/S007174</a>		<a href="http://www.tr-electronic.com/s/S007175">www.tr-electronic.com/s/S007175</a>
QR-Code			

\*Factory set





Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Magnet detection (M)

Products	CMS36-M	CMF36-S	CDV36-S	
				
Detection	Magnet detection (M)	Magnet detection (M)	Magnet detection (M)	
Single / multi	(M) Multi	(S) Single	(S) Single	
Supply	11...27 VDC	11...27 VDC	11...27 VDC	
Steps per turn	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*	
Number of turns	4,096 (option: 16,777,216)	1	1	
Shaft diameters available	8mm blind shaft	See drawings section	6mm	
Connectors	Cable gland axial, M12 axial (DRIVE CLiQ)	Cable gland axial	2x cable gland axial	
Maximum SIL/PL				
Ambient temperature	-25...+70°C	-25...+70°C	-25...+70°C	
Protection class	IP54 (option IP65)	IP65 (option IP69k)	IP65 (option IP69k)	
Interface	<b>SSI</b>  <b>ASI</b> <b>CAN</b>	<b>SSI</b> <b>ASI</b> <b>Analog</b> <b>CAN</b>	<b>SSI</b>	
Option, additional interfaces (on request)	<b>INC</b>	<b>INC</b>	<b>SSI</b>	
Weblink	<a href="http://www.tr-electronic.com/s/S007176">www.tr-electronic.com/s/S007176</a>	<a href="http://www.tr-electronic.com/s/S007177">www.tr-electronic.com/s/S007177</a>	<a href="http://www.tr-electronic.com/s/S007178">www.tr-electronic.com/s/S007178</a>	
QR-Code				

\*Factory set


## Magnet detection (M)

	CDV36-M	CDF36-S
		
	Magnet detection (M)	Magnet detection (M)
	(M) Multi	(S) Single
	11...27 VDC	11...27 VDC
	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*	32, 40, 64, 80, 100, 128, 160, 200, 256, 320, 400, 500, 512, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192*
	4.096	1
	6mm	See drawings section
	2x cable gland axial	2x cable gland axial
	-25...+70°C	-25...+70°C
	IP54 (option IP65)	IP65 (option IP69k)
	<b>SSI</b>	<b>SSI</b>
	<b>SSI</b>	<b>SSI</b>
	<a href="http://www.tr-electronic.com/s/S007179">www.tr-electronic.com/s/S007179</a>	<a href="http://www.tr-electronic.com/s/S007180">www.tr-electronic.com/s/S007180</a>
		

\*Factory set

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Absolute Rotary Encoders - Family C\_\_58 - Housing 58 mm

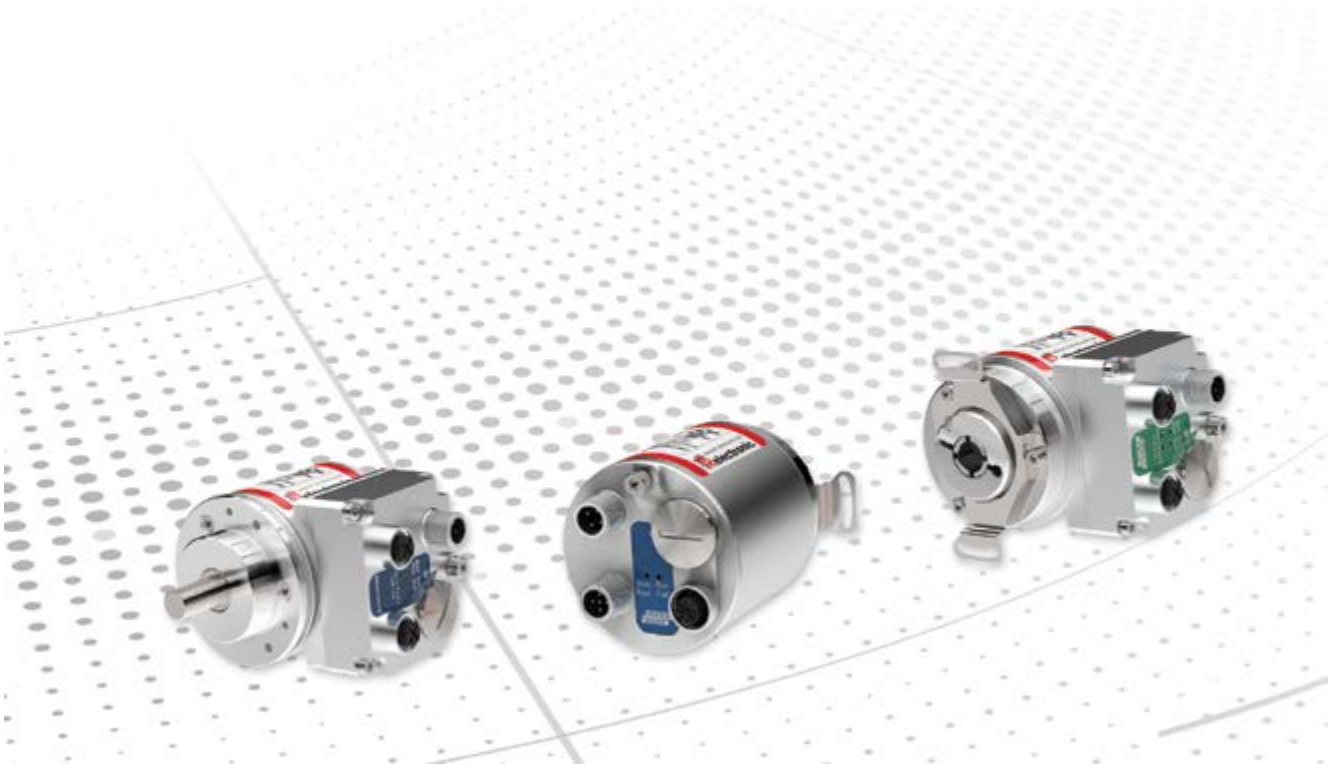





### 58 mm housing for standard industrial applications

Encoders with size 58 mm have been established as the industrial standard for absolute and incremental encoders. With TR-Electronic, you get as a standard what is special with other manufacturers. Absolute encoders of Series 58 are modular. Your demands can be realized precisely and in most cases without any special development.

- \_ Industrial standard size 58 mm
- \_ Cost optimized by different resolution ranges
- \_ Compatible with a vast number of control systems
- \_ Shaft-, flange - and assembly versions
- \_ Same mechanics - plenty of interfaces
- \_ Compact Connector System - perfect for machines produced in series
- \_ Can be adapted to singular applications via parametrization done by user
- \_ Available with customer-specific connector systems
- \_ UL approval for most types

## Magnet detection (M)







Product	CMV582	CMS582
		
Detection	Magnet detection (M)	Magnet detection (M)
Single / multi	(M) Multi (S) single	(M) Multi (S) single
Supply	11...27 VDC *	11...27 VDC *
Full resolution	$\leq 25$ bit *	$\leq 25$ bit *
Steps per turn	$\leq 8192$ *	$\leq 8192$ *
Number of turns	$\leq 4096$ *	$\leq 4096$ *
Precision	$\pm 0,5^\circ$	$\pm 0,5^\circ$
Shaft diameters available	6, 8, 10, 12, 14, 1/4", 3/8", 1/2"	6, 8, 10, 12, 14, 15, 1/4", 3/8", 1/2"
Connectors	Connector axial or radial *	Connector axial or radial *
Ambient temperature	-20...+75 °C	-20...+75 °C
Protection class	IP65	IP65
ATEX-zone	Option 2/22	Option 2/22
Interface	<div> <div>SSI</div> <div>INTERBUS</div> <div>Analog</div> <div>PROFINET</div> <div>DRIVE-CLIQ</div> <div>EtherCAT</div> <div>PROFIBUS</div> <div>EtherNet/IP</div> <div>CANopen</div> <div>ETHERNET POWERLINK</div> <div>EtherCAT P</div> <div>IO-Link</div> </div>	<div> <div>SSI</div> <div>INTERBUS</div> <div>Analog</div> <div>PROFINET</div> <div>DRIVE-CLIQ</div> <div>EtherCAT</div> <div>PROFIBUS</div> <div>EtherNet/IP</div> <div>CANopen</div> <div>ETHERNET POWERLINK</div> <div>EtherCAT P</div> <div>IO-Link</div> </div>
Option, additional interfaces (on request)	SSI	SSI
Weblink	<a href="http://www.tr-electronic.com/s/S013306">www.tr-electronic.com/s/S013306</a>	<a href="http://www.tr-electronic.com/s/S013307">www.tr-electronic.com/s/S013307</a>
QR-Code		

\* depending on the interface

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))




















Optical 15 bit (E)

Product	CEV582	CEH582	CES582	
				
Detection	Optical 15 bit (E)	Optical 15 bit (E)	Optical 15 bit (E)	
Single / multi	(M) Multi (S) single	(M) Multi (S) single	(M) Multi (S) single	
Supply	11...27 VDC *	11...27 VDC *	11...27 VDC *	
Full resolution	<= 33 bit *	<= 33 bit *	<= 33 bit *	
Steps per turn	<= 32768 *	<= 32768 *	<= 32768 *	
Number of turns	<= 256000 *	<= 256000 *	<= 256000 *	
Precision	± 1 digit	± 1 digit	± 1 digit	
Shaft diameters available	6, 8, 10, 12, 14, 1/4", 3/8", 1/2"	6, 8, 10, 12, 14, 15, 1/4", 3/8", 1/2"	6, 8, 10, 12, 14, 15, 1/4", 3/8", 1/2"	
Connectors	Connector axial or radial *	Connector radial	Connector axial or radial *	
Ambient temperature	-20...+75 °C	-20...+75 °C	-20...+75 °C	
Protection class	IP65	IP54, option 65	IP65	
ATEX-zone	Option 2/22	Option 2/22	Option 2/22	
Interface	<div>SSI</div> <div>INTERBUS</div> <div>Analog</div> <div>PROFIBUS</div> <div>DRIVE-CLIQ</div> <div>EtherCAT</div> <div>PROFINET</div> <div>EtherNet/IP</div> <div>CANopen</div> <div>ETHERNET POWERLINK</div> <div>EtherCAT P</div> <div>IO-Link</div>	<div>SSI</div> <div>INTERBUS</div> <div>Analog</div> <div>PROFIBUS</div> <div>DRIVE-CLIQ</div> <div>EtherCAT</div> <div>PROFINET</div> <div>EtherNet/IP</div> <div>CANopen</div> <div>ETHERNET POWERLINK</div> <div>EtherCAT P</div> <div>IO-Link</div>	<div>SSI</div> <div>INTERBUS</div> <div>Analog</div> <div>PROFIBUS</div> <div>DRIVE-CLIQ</div> <div>EtherCAT</div> <div>PROFINET</div> <div>EtherNet/IP</div> <div>CANopen</div> <div>ETHERNET POWERLINK</div> <div>EtherCAT P</div> <div>IO-Link</div>	
Option, additional interfaces (on request)	SSI INC	SSI INC	SSI INC	
Weblink	<a href="http://www.tr-electronic.com/s/S013308">www.tr-electronic.com/s/S013308</a>	<a href="http://www.tr-electronic.com/s/S013312">www.tr-electronic.com/s/S013312</a>	<a href="http://www.tr-electronic.com/s/S013313">www.tr-electronic.com/s/S013313</a>	
QR-Code				

\* depending on the interface


## Optical 18 bit (O)

COV582	COH582	COS582
		
Optical 18 bit (O)	Optical 18 bit (O)	Optical 18 bit (O)
(M) Multi (S) single	(M) Multi (S) single	(M) Multi (S) single
11...27 VDC *	11...27 VDC *	11...27 VDC *
<= 36 bit *	<= 36 bit *	<= 36 bit *
<= 262144 *	<= 262144 *	<= 262144 *
<= 262144 *	<= 262144 *	<= 262144 *
± 1 digit	± 1 digit	± 1 digit
6, 8, 10, 12, 14, 1/4", 3/8", 1/2"	6, 8, 10, 12, 14, 15, 1/4", 3/8", 1/2"	6, 8, 10, 12, 14, 15, 1/4", 3/8", 1/2"
Connector axial or radial *	Connector radial	Connector axial or radial *
-20...+75 °C	-20...+75 °C	-20...+75 °C
IP65	IP54, option 65	IP65
Option 2/22	Option 2/22	Option 2/22
<b>SSI</b> <b>Analog</b>   <b>CANopen</b>   	<b>SSI</b> <b>Analog</b>   <b>CANopen</b>   	<b>SSI</b> <b>Analog</b>   <b>CANopen</b>   
<b>SSI</b> <b>INC</b>	<b>SSI</b> <b>INC</b>	<b>SSI</b> <b>INC</b>
<a href="http://www.tr-electronic.com/s/S013314">www.tr-electronic.com/s/S013314</a>	<a href="http://www.tr-electronic.com/s/S013315">www.tr-electronic.com/s/S013315</a>	<a href="http://www.tr-electronic.com/s/S013316">www.tr-electronic.com/s/S013316</a>
		

\* depending on the interface

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Rotary Encoder - Family C\_\_65 - Housing 65 mm

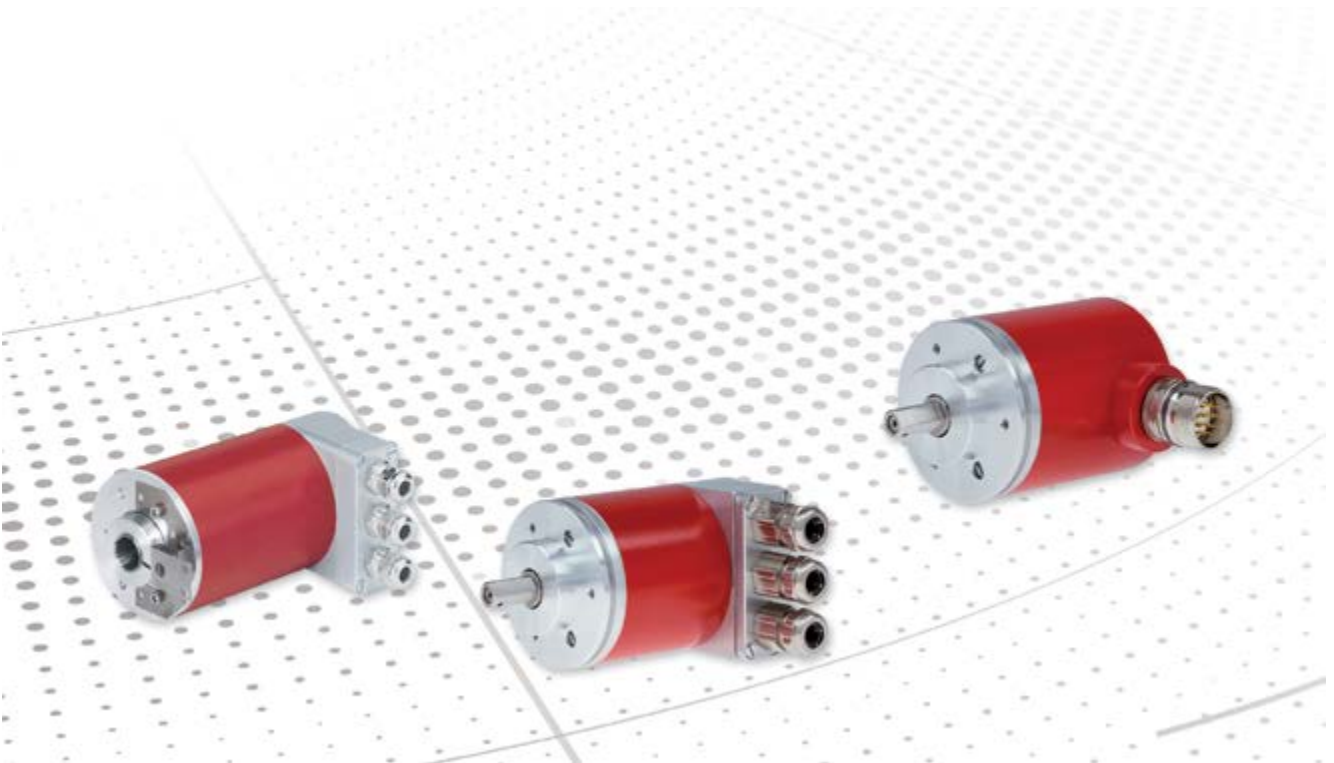










### The 65 mm housing with room for more options

Encoders size 65 have been established in the marketplace for some times. Comfortable room for wiring in the rugged fieldbus hood makes them attractive when encoder cabling is done directly on the construction site, e.g. in facility automation and special machines. Even unusual interface combinations are possible directly "out of the box", without special development. Due to changeable shafts and flanges, a vast number of shaft/flange combinations are available in short order.

- \_ Size 65 mm
- \_ many flange/shaft combinations
- \_ ample wiring room for fieldbusses - perfect for special machines and big facilities
- \_ User programmable, suited to special applications even in small quantities
- \_ Room for customer-specific connection systems
- \_ Option: Atex Zone 2/22

# Magnet detection (M)






## Optical 15 bit (E)

Product	CMV65	CEV65	CES65
			
Detection	Magnet detection (M)	Optical 15 bit (E)	Optical 15 bit (E)
Single / multi	(M) Multi (S) Single	(M) Multi (S) Single	(M) Multi (S) Single
Supply	11...27 VDC	11...27 VDC (A: 18...27VDC)	11...27 VDC (A: 18...27VDC)
Full resolution	<= 23 .. 24 bit	<= 25 ... 33 bit	<= 25 ... 33 bit
Steps per turn	2048 /2096	8192 / 32768	8192 / 32768
Number of turns	4096	32768 / 25600	32768 / 25600
Precision	± 1,0 °	± 1 digit	± 1 digit
Shaft diameters available	6...12mm	6...12mm	8, 10, 12mm
Connectors	Connectors axial or radial *	Cable gland or connector, radial or axial, fieldbus hood radial *	Cable gland or connector, radial or axial, fieldbus hood radial *
Ambient temperature	-20...+70 °C	-20...+70 °C	-20...+70 °C
Protection class	IP65	IP65	IP65
ATEX-zone			
Interface	<b>SSI</b> 	<b>SSI</b> <b>Nocken</b> <b>Analog</b>  <b>ASI</b> <b>CANopen</b> <b>Parallel</b> <b>DeviceNet</b>	<b>SSI</b>  <b>Analog</b> <b>EtherNet/IP</b> <b>Parallel</b>
Option, additional interfaces (on request)		<b>SSI</b> <b>Nocken</b> <b>Analog</b> <b>INC</b> <b>Parallel</b> <b>SIN / COS</b>	<b>SSI</b> <b>Nocken</b> <b>Analog</b> <b>INC</b> <b>Parallel</b> <b>SIN / COS</b>
Weblink	<a href="http://www.tr-electronic.com/s/S007147">www.tr-electronic.com/s/S007147</a>	<a href="http://www.tr-electronic.com/s/S007148">www.tr-electronic.com/s/S007148</a>	<a href="http://www.tr-electronic.com/s/S007149">www.tr-electronic.com/s/S007149</a>
QR-Code			

\* depending on the interface

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

# Optical 18 bit (O) Optical 15 bit (E)

Product	COV65	AEV65
		
Detection	Optical 18 bit (O)	Optical 15 bit (E)
Single / multi	(M) Multi (S) Single	(M) Multi (S) Single
Supply	11...27 VDC (A: 18...27VDC)	11...27 VDC (A: 18...27VDC)
Full resolution	<= 36 bit	<= 33 bit
Steps per turn	262144	32768
Number of turns	25600	25600
Precision	± 1 digit	± 1 digit
Shaft diameters available	6...12mm	6...12mm
Connectors	Cable gland or connector, radial or axial, fieldbus hood radial *	Connectors axial or radial *
Ambient temperature	-20...+70 °C	-20...+60 °C
Protection class	IP65	IP64
ATEX-zone		2/22
Interface	<b>SSI</b>  <b>ASI</b>	<b>SSI</b> <b>Analog</b>
Option, additional interfaces (on request)	<b>SSI</b> <b>ASI</b>	
Weblink	<a href="http://www.tr-electronic.com/s/S007150">www.tr-electronic.com/s/S007150</a>	<a href="http://www.tr-electronic.com/s/S007151">www.tr-electronic.com/s/S007151</a>
QR-Code		


\* depending on the interface

Can't find the right variant? Please contact us (info@tr-electronic.de)





## Encoder - Family C\_H80 - Housing 80 mm

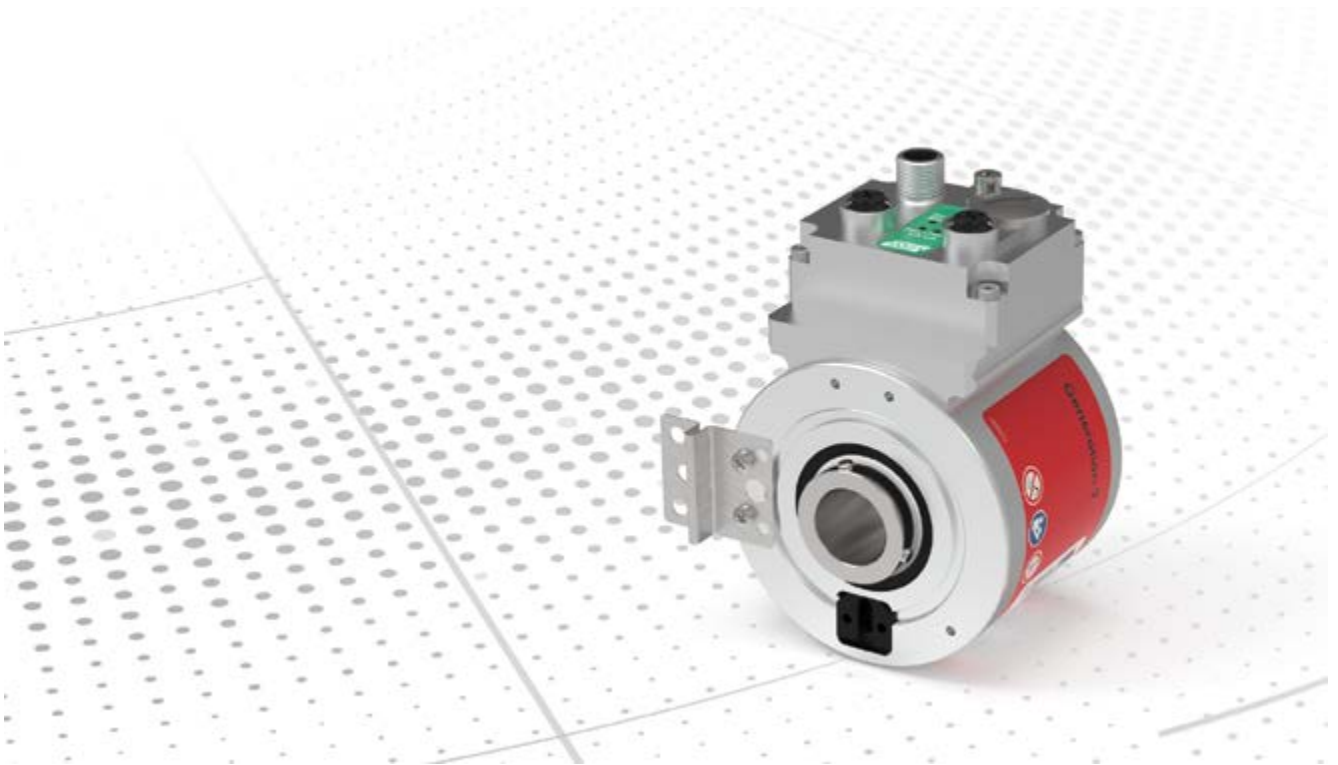


















### Hollow shaft encoder for shafts up to 27 mm

Hollow shaft encoders made by TR-Electronic provide a current absolute position reading value immediately after power up without any referencing, counters or batteries. The encoder is supported mechanically by the passing shaft. To prevent the encoder from turning with the shaft, a compact torque support spring can be used or a pin/groove connection in the flange of the encoder. Family 80 covers shaft diameters from 10 to 27 mm with an extensive choice of industrial interfaces as you've come to expect from TR-Elec-














tronic. Two resolution classes meet your demands perfectly: CEH measures up to 15 bits per turn, COH up to 18 bits per turn. Both detections measure up to 256,000 absolute turns. C\_H80 is available for ATEX Zones 2/22 named A\_H80. See chapter "Absolute rotary encoders - ATEX - Zone 2/22".

# Optical 15 bit (E)

# Optical 18 bit (O)

Product	CEH80	CEH802	COH80
			
Detection	Optical 15 bit (E)	Optical 15 bit (E)	Optical 18 bit (O)
Single / multi	(M) Multi (S) Single	(M) Multi (S) Single	(M) Multi (S) Single
Supply	24 VDC (11...27)	24 VDC (11...27)	24 VDC (11...27)
Steps per turn	32768	32768	262144
Number of turns	256000	256000	262144
Shaft diameters available	10, 14, 16, 20, 24, 25, 27	10, 14, 16, 20, 24, 25, 27	10, 14, 16, 20, 24, 25, 27
Connectors	Connector radial (option: cable*)	3x M12	Connector radial (option: cable*)
Ambient temperature	0...+60 °C (option -20...+70 °C)	-20...+70 °C	0...+60 °C (option -20...+70 °C)
Protection class	IP54	IP54	IP54
Interface	<b>SSI</b>	          	<b>SSI</b>
Option, additional interfaces (on request)	<b>INC</b>		<b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S008496">www.tr-electronic.com/s/S008496</a>	<a href="http://www.tr-electronic.com/s/S019339">www.tr-electronic.com/s/S019339</a>	<a href="http://www.tr-electronic.com/s/S008497">www.tr-electronic.com/s/S008497</a>
QR-Code			

## Optical 18 bit (O)

Product	COH802 
Detection	Optical 18 bit (O)
Single / multi	(M) Multi (S) Single
Supply	24 VDC (11...27)
Steps per turn	262144
Number of turns	262144
Shaft diameters available	10, 14, 16, 20, 24, 25, 27
Connectors	3x M12
Ambient temperature	-20...+70°C
Protection class	IP54
Interface	          
Option, additional interfaces (on request)	
Weblink	<a href="http://www.tr-electronic.com/s/S019339">www.tr-electronic.com/s/S019339</a>
QR-Code	



## Rotary Encoder - Family Q\_H80/81 - Housing 80 mm



### Hollow shaft encoder for shafts up to 25 mm

Hollow shaft encoders made by TR-Electronic provide a current absolute position reading value immediately after power up without any referencing, counters or batteries. The encoder is supported mechanically by the passing shaft. The larger housing (compared with C\_H80) offers more room and possibilities for interfaces and interface combinations. Special highlight: The same encoder contains more interfaces and only the clamps used in the spacious connection hood decide which interface is to be used in your application.




Combination of multi-turn with an independent single-turn detection can be used for a simple cross-check of the encoder position (single-turn is used to monitor the multi-turn-detection in a separate monitoring unit) or to provide special feedback systems for commutation (also with SIN/COS).

## Optical 15 bit (E) Double detection (D)

<b>Products</b>			
<b>Detection</b>	Optical 15 bit (E)	Optical 15 bit (E)	Double detection (D)
<b>Single / multi</b>	(M) Multi (S) Single	(M) Multi (S) Single	(M) Multi (S) Single (2nd detection: Single)
<b>Supply</b>	24 VDC (11..27)	24 VDC (11..27)	24 VDC (11..27)
<b>Steps per turn</b>	<= 8192	<= 8192	<= 8192
<b>Number of turns</b>	<= 256000	<= 256000	<= 256000
<b>Shaft diameters available</b>	16, 20, 24, 25	16, 20, 22, 24, 25	12, 14, 16, 20, 22, 24, 25
<b>Connectors</b>	Connector radial, connection hood with cable glands	Connector radial, connection hood with cable glands	Connector radial, connection hood with cable glands
<b>Ambient temperature</b>	0...+60 °C (option -20...+70 °C)	0...+60 °C (option -20...+70 °C)	0...+60 °C (option -20...+70 °C)
<b>Protection class</b>	IP54	IP54	IP54
<b>Interface</b>	<b>SSI</b>   <b>INC</b>	<b>SSI</b>   <b>INC</b>	<b>SSI</b>   <b>INC</b>
<b>Option, additional interfaces (on request)</b>	<b>INC</b>	<b>INC</b>	<b>INC</b>
<b>Weblink</b>	<a href="http://www.tr-electronic.com/s/S008515">www.tr-electronic.com/s/S008515</a>	<a href="http://www.tr-electronic.com/s/S008518">www.tr-electronic.com/s/S008518</a>	<a href="http://www.tr-electronic.com/s/S008516">www.tr-electronic.com/s/S008516</a>
<b>QR-Code</b>			

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))


## Double detection (D)

Products	QDH81 
Detection	Double detection (D)
Single / multi	(M) Multi (S) Single (2nd detection: Single)
Supply	24 VDC (11..27)
Steps per turn	<= 8192
Number of turns	<= 256000
Shaft diameters available	16, 20, 22, 24, 25
Connectors	Connector radial, connection hood with cable glands
Ambient temperature	0...+60 °C (option -20...+70 °C)
Protection class	IP54
Interface	<b>SSI</b>  <b>INC</b>
Option, additional interfaces (on request)	<b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S008517">www.tr-electronic.com/s/S008517</a>
QR-Code	





## Rotary Encoders - Stainless Steel Housing - C\_\_84

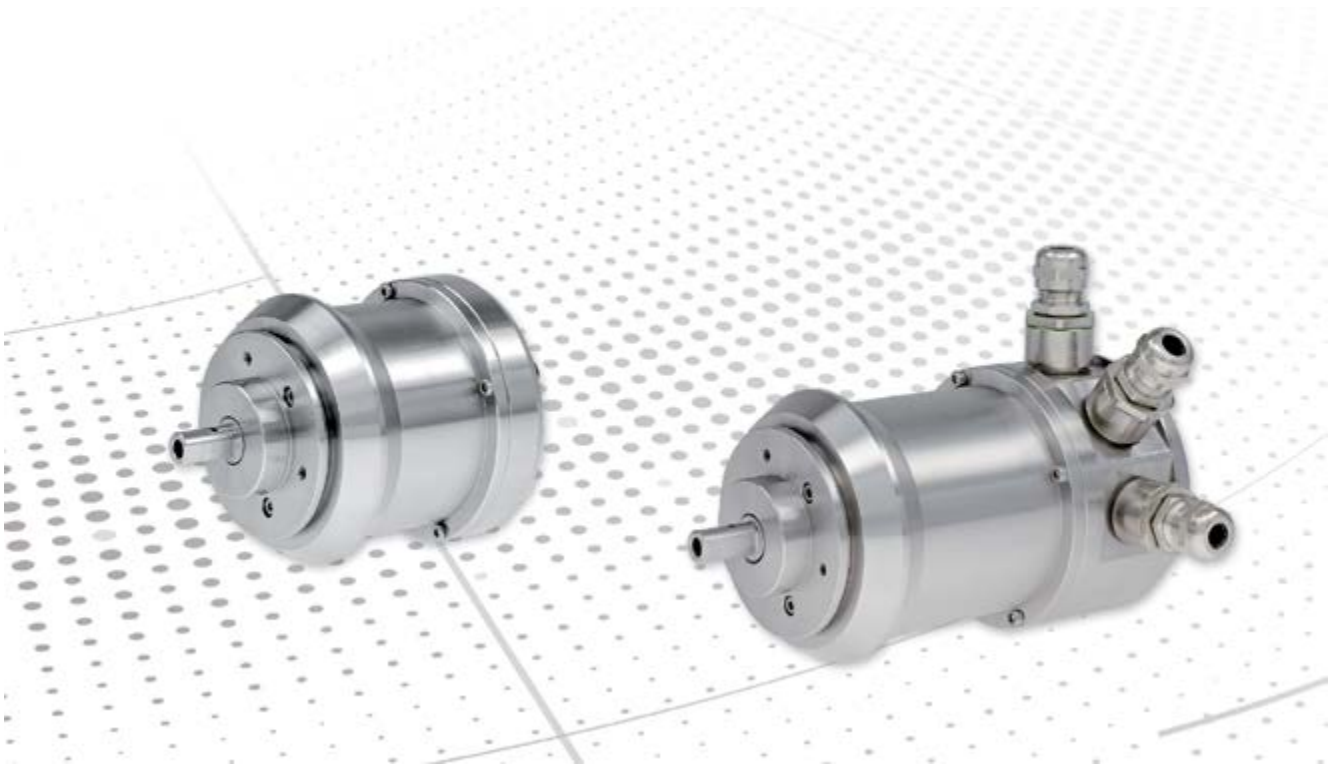







### Protective housing for aggressive surroundings

In paper processing it is groundwood pulp, in process technology it is acids and lyes, in food processing technology it is hot cleaning solutions under high pressure. Rotary encoders constantly come into contact with corrosive media. Compact rotary encoders are suitably equipped for an aggressive environment: Encased in the proven protective housing, the CEV84Ms can withstand everything that an ordinary stainless steel can tolerate. At the same time they can be cleaned with water under high pressure and are therefore also suitable for

use in food processing machines and plants. For industrial Ethernet, installation and activation is considerably simplified. The encoder is integrated into the network by watertight connectors located at the rear side of the encoder. CEV84M brings the world of cutting-edge industrial networks to paper machines, process plants and to the pharmaceutical and food industries.


Stainless steel housings of series 84 provides perfect protection in aggressive surroundings even for the most recent Generation 582 with all its interface features.

## Stainless steel

Product	CEV84	CEV84 Field Bus	CEV84 Industrial Ethernet
			
Material	1.4305 (X12 Cr NiS 18 08 / 18 9)	1.4305 (X12 Cr NiS 18 08 / 18 9)	1.4305 (X12 Cr NiS 18 08 / 18 9)
Detection, Resolution choose from	C__58, L__58	C__58, L__58	C__58, L__58
Supply	11...27 VDC	11...27 VDC	11...27 VDC
Maximum rpm	3000 1/min	3000 1/min	3000 1/min
Mass (typical)	1,5..2,5 kg	1,5..2,5 kg	1,5..2,5 kg
Shaft diameters available	6, 10, 12 mm	6, 10, 12 mm	6, 10, 12 mm
Connectors	M23 axial / radial	Fieldbus hood / cable glands radial	3 x M12 axial
Ambient temperature	-20...+70 °C (option -40...+85 °C)	-20...+70 °C (option -40...+85 °C)	-20...+70 °C (option -40...+85 °C)
Protection class	IP68	IP68	IP68
ATEX			
Interface	<b>SSI</b> <b>Parallel</b>  <b>Analog</b>	 DeviceNet  	 ETHERNET POWERLINK   EtherNet/IP
Option, additional interfaces (on request)	<b>Analog</b> <b>INC</b>  <b>Parallel</b>	<b>SSI</b> <b>Parallel</b>  <b>Analog</b> <b>INC</b>	
Weblink	<a href="http://www.tr-electronic.com/s/S007190">www.tr-electronic.com/s/S007190</a>	<a href="http://www.tr-electronic.com/s/S007190">www.tr-electronic.com/s/S007190</a>	<a href="http://www.tr-electronic.com/s/S007190">www.tr-electronic.com/s/S007190</a>
QR-Code			

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Rotary Encoders - Family C\_H110(2) - Housing 110 mm

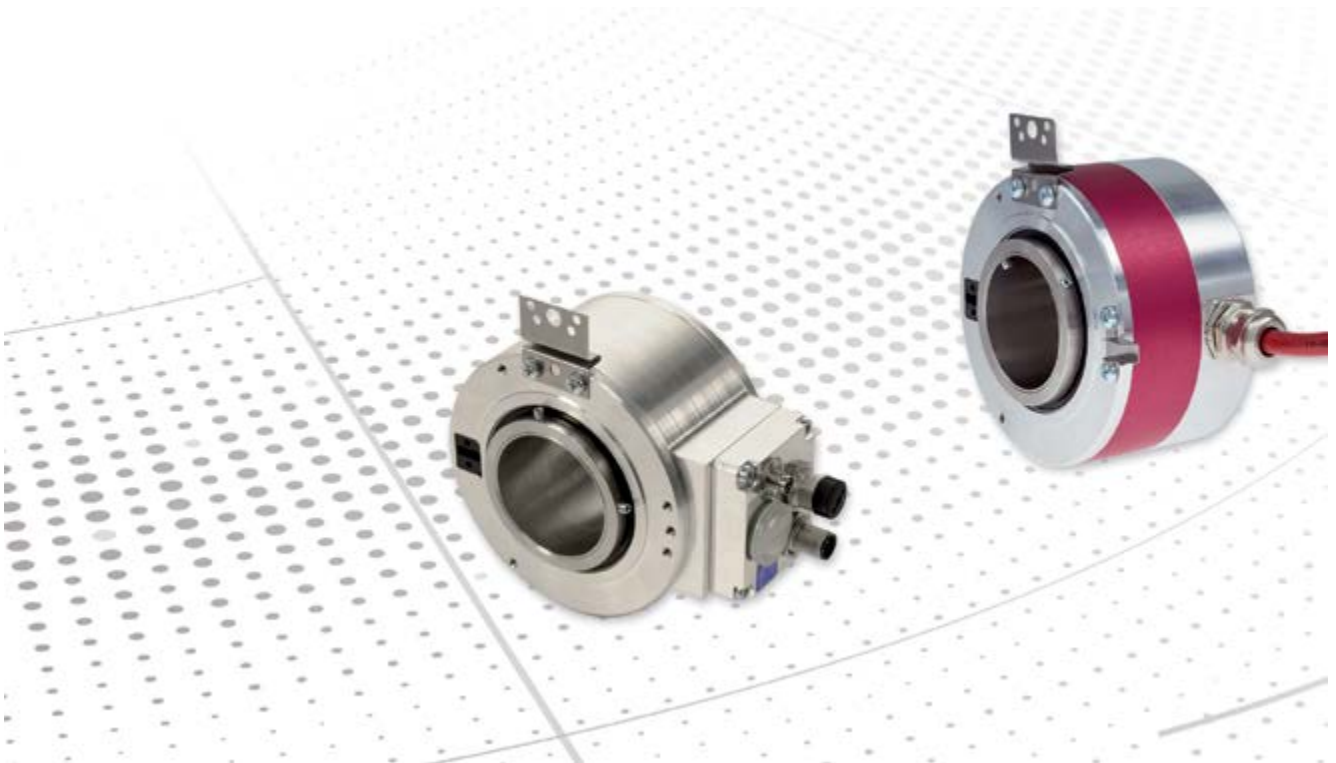


















### Hollow shaft encoder for shafts up to 50 mm

Hollow shaft encoders made by TR-Electronic provide a current absolute position reading value immediately after power up without any referencing, counters or batteries. The encoder is supported mechanically by the passing shaft. To prevent the encoder from turning with the shaft, a compact torque support spring can be used or a pin/groove connection in the flange of the encoder. Family 110 covers shaft diameters from 15 up to 20 mm with an extensive choice of industrial interfaces as you've come to expect from TR-Electronic. Two resolution classes fit your demands perfectly: CEH measures up to 15 bits per turn, COH up to 18 bits per turn. Both detections measure up to 262,144 absolute turns.

# Optical 15 bit (E)














# Optical 18 bit (O)

Product	CEH110	CEH1102	COH110
			
Detection	Optical 15 bit (E)	Optical 15 bit (E)	Optical 18 bit (O)
Single / multi	(M) Multi (S) Single	(M) Multi (S) Single	(M) Multi (S) Single
Supply	24 VDC (11...27)	24 VDC (11...27)	24 VDC (11...27)
Steps per turn	32768	32768	262144
Number of turns	256000	256000	262144*
Shaft diameters available	15, 28, 30, 35, 38, 40, 45, 50	15, 28, 30, 35, 38, 40, 45, 50	15, 28, 30, 35, 38, 40, 45, 50
Connectors	connector radial	connector radial	connector radial
Ambient temperature	0...+60 °C (option -20...+70 °C)	0...+60 °C (option -20...+70 °C)	0...+60 °C (option -20...+70 °C)
Protection class	IP54	IP54	IP54
Interface	<b>SSI</b>	          	<b>SSI</b>
Option, additional interfaces (on request)	<b>INC</b>	<b>INC</b>	<b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S008519">www.tr-electronic.com/s/S008519</a>	<a href="http://www.tr-electronic.com/s/S008519">www.tr-electronic.com/s/S008519</a>	<a href="http://www.tr-electronic.com/s/S008520">www.tr-electronic.com/s/S008520</a>
QR-Code			

\* depending on the interface

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

# Optical 15 bit (E) Optical 18 bit (O)


Product	COH1102 
Detection	Optical 18 bit (O)
Single / multi	(M) Multi (S) Single
Supply	24 VDC (11...27)
Steps per turn	262144
Number of turns	262144*
Shaft diameters available	15, 28, 30, 35, 38, 40, 45, 50
Connectors	connector radial
Ambient temperature	0...+60 °C (option -20...+70 °C)
Protection class	IP54
Interface	          
Option, additional interfaces (on request)	<b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S008520">www.tr-electronic.com/s/S008520</a>
QR-Code	

\* depending on the interface

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))



## Rotary Encoders - Family C\_V115 - Housing 115 mm

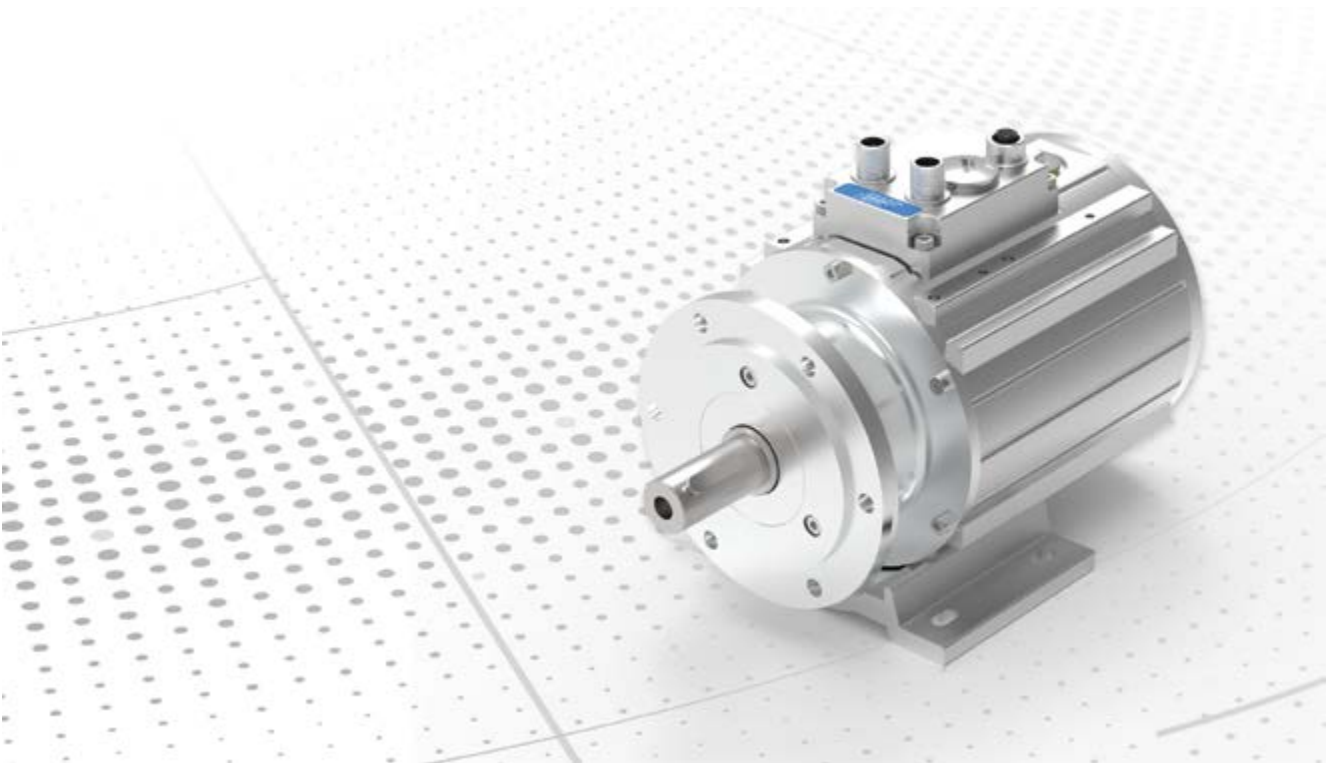

### Heavy-duty protective housing for rotary encoders families C\_\_58, C\_\_65 and I\_\_58

In crane installations, mining, oil and gas production, steelworks or in wind power plants rotary encoders must perform their tasks reliably even under the most demanding environmental conditions and extreme mechanical influences. This demands particularly intelligent and robust design, as well as durable technology. Heavy-duty absolute rotary encoders family C\_V115 from TR-Electronic offer thick-walled housings made of aluminium and are equipped with heating or cooling elements if required. Internally, the detection and interface technology of the C\_\_58, C\_\_65, CD\_75 (SIL) and I\_\_58 series are used. With same mechanics, types for explosive atmospheres for Zones 2/22 are available.



# Housing option for rotary encoders


## Encoder with protective housing

## Double encoder with protective housing

Product	C_V115	AEV115	ADV115
			
Type	Housing option for rotary encoders	Encoder with protective housing	Double encoder with protective housing
Technical data encoder	See rotary encoders C__58 / C__65 / I__58	8192 / 256000	8192 / 256000
Shaft diameters available	12, 14, 20	12, 14, 20	12, 14, 20
Connectors	Cable gland / connector	Cable gland	Cable gland
Ambient temperature	-20...+60 °C	0...+40 °C	0...+40 °C
Protection class	IP65 (option IP67)	IP65	IP65
ATEX zone	Option 22	22	22
Interface	<b>SSI</b> <b>DeviceNet</b> <b>Analog</b> <b>PROFINET</b> <b>Parallel</b> <b>EtherCAT</b> <b>Nocken</b> <b>EtherNet/IP</b> <b>PROFIBUS</b> <b>ETHERNET POWERLINK</b> <b>CANopen</b>	<b>PROFIBUS</b>	<b>SSI</b> <b>PROFIBUS</b>
Option, additional interfaces (on request)		<b>SSI</b>	<b>SSI</b> <b>INC</b>
Weblink	<a href="http://www.tr-electronic.com/s/S008524">www.tr-electronic.com/s/S008524</a>	<a href="http://www.tr-electronic.com/s/S008524">www.tr-electronic.com/s/S008524</a>	<a href="http://www.tr-electronic.com/s/S008525">www.tr-electronic.com/s/S008525</a>
QR-Code			

Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

## Encoder - Family M\_\_Display - Position Indicators

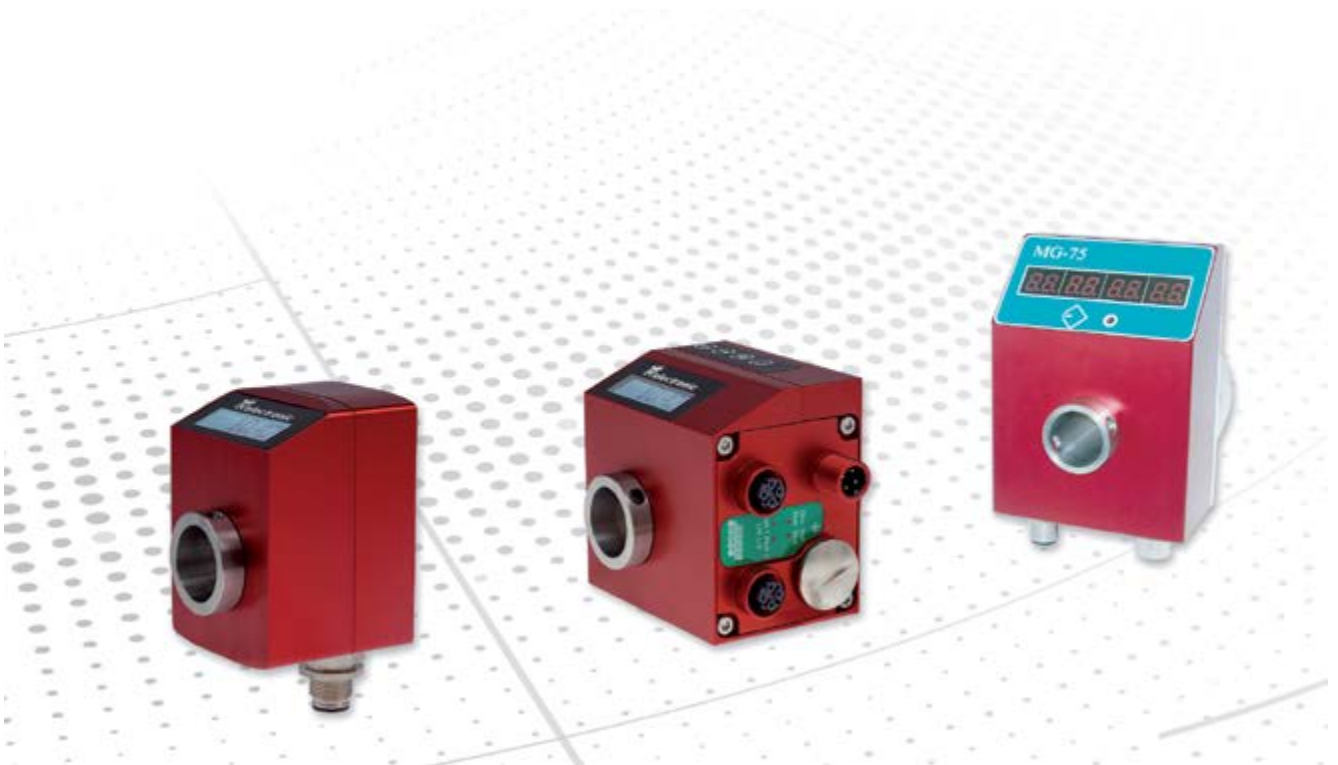

### When information is needed directly in the applications








Position indicator encoders MG provide absolute multiturn position information directly where the movement happens. Manual adjustments can be observed with high precision and reliability.

MG48 is available as position indicator encoder, driven by the solid shaft inserted into the encoders hollow shaft. The modern, graphic capable display provides best legibility. Due to flexible programming, the display orientation fits different integration situations. For programming, USB interface is integrated. The mini-USB-connector is protected by a threaded plug.

The bus-version MG48 BUS and MG75 adds the possibility to connect the encoder to a central control. With this feature, all manual adjustments can be documented by the control and even parametrized by sending new target values from the control to the encoder.

Number of steps per turn and number of turns can be programmed with both systems. MG48 BUS communicates via industrial standard bus systems with a master control.

## Magnet detection (M)

Product	MG48	MG48 BUS	MG75
			
Detection	Magnet detection (M)	Magnet detection (M)	Magnet detection (M)
Single / multi	(M) Multi	(M) Multi	(M) Multi
Application	Electronic Position Indicator	Electronic Position Indicator with Industrial Ethernet	Electronic Position Indicator with Control Communication
Supply	11...27VDC	11...27VDC	11...27VDC
Steps per turn	4096	4096	64
Number of turns	4096	4096	65536
Shaft diameters available	20H7	20H7	20H7
Connectors	M12 connector	M12 connector	2 M12 connectors
Ambient temperature	0...+60 °C	0...+60 °C	0...+60 °C
Protection class	IP50	IP50	IP50
Interface		  	<b>ASI</b>
Weblink	<a href="http://www.tr-electronic.com/s/S016505">http://www.tr-electronic.com/s/S016505</a>	<a href="http://www.tr-electronic.com/s/S016505">http://www.tr-electronic.com/s/S016505</a>	
QR-Code			

Can't find the right variant? Please contact us (info@tr-electronic.de)

### Headquarters

**TR-Electronic GmbH**  
Eglishalde 6  
D-78647 Trossingen  
Germany  
Tel.: +49/7425 228-0  
Fax: +49/7425 228-33  
info@tr-electronic.de  
www.tr-electronic.de

### Belgium

**TR-Electronic Benelux**  
Dorpstraat 18C  
NL-5386AM Geffen  
Tel.: +31/73 844 9600  
Mobil: +31/6383 28 303  
rene.verbruggen@tr-electronic.nl  
www.tr-electronic.nl

### Czech Republic, Slovakia

**DEL a.s.**  
Biskupský dvůr 1146/7  
Nové Město  
CZ-110 00 Praha 1  
Tel.: +420/566 657 100  
Fax: +420/566 621 657  
tr-electronic@del.cz  
www.del.cz

### India

**Spohn Burkhardt India**  
9th Main Road, 500,  
33rd A Cross Road  
7th Cross, 4th Block Jayanagar  
IN-Bangaluru - 560 011, India  
Mobile: +91/98451 46948  
info@spobu-india.in  
www.spobu-india.in

### International

#### Argentina

**AEA Aparatos Eléctricos Automáticos S.A.C.I.E.**  
Asunción 2130  
AR-1419 Buenos Aires  
Tel.: +54/11 - 4574 1155  
Fax: +54/11 - 4574 2400  
servicioalcliente@aea.com.ar  
www.aea.com.ar

#### Brazil

**Grupo C+Tecnologia**  
Rua dos Caetés 601  
CEP - 05419-000  
BR-Perdizes - São Paulo - SP  
Tel.: +55/11-2168 655-4  
Fax: +55/11-2168 655-5  
info@ctecnologia.com.br  
www.ctecnologia.com.br

#### Denmark

**TR-Electronic Danmark ApS**  
Skæervegyden 7  
DK-8723 Løsning  
Tel.: +45/75 89 06 03  
cbj@tr-electronic.dk  
www.tr-electronic.dk

#### Israel

**Dor Drives Systems 2020 Ltd.**  
P.O.Box 6  
IL-4880500 Kibutz Einat  
Tel.: +972/3 900 75 95  
Fax: +972/3 900 75 99  
info@doreng.co.il  
www.doreng.co.il

#### Australia (New Zealand)

**Sensor Measurement**  
Unit 8/26 Shields Crescent  
P.O. Box 1079  
AU-Booragoon  
Western Australia 6154  
Tel.: +61/8-93 17 25 52  
Fax: +61/8-93 17 24 52  
sales@sensormeasurement.com.au  
www.sensormeasurement.com.au

#### Canada

**TR Electronic**  
P.O. Box 2543, Station B  
CA-London  
Ontario Canada N6A 4G9  
Tel.: +1/519-452 1999  
Fax: +1/519-452 1177  
customercare@trelectronic.com  
www.trelectronic.com

#### Finland

**Sarlin Oy Ab**  
P.O. Box 750  
FI-00101 Helsinki  
Tel.: +358/10 - 550 4000  
Fax: +358/10 - 550 4201  
asiakaspalvelu@sarlin.com  
www.sarlin.com

#### Italy

**Telestar S.r.l.**  
Via Novara, 35  
IT-28010 Vaprio D'Agogna (NO)  
Tel.: +39/03-21 966-768  
Fax: +39/03-21 966-281  
telestar@telestar-automation.it  
www.telestar-automation.it

#### Australia

**Leuze electronic PTY Ltd.**  
Unit 2/843 Mountain Highway  
Bayswater VIC 3153  
Tel.: +61/1300 538 933  
Fax: +61/3 9738 2677  
sales@leuze.com.au  
www.leuze.com.au

#### Chile

**Allware**  
Casa Haverbeck  
General Lagos 2060 2° Piso  
Region de Los Rios Valdivia  
CHL-Santiago Chile  
Tel.: +56 63/239298  
Sales@allware.cl  
www.allware.cl

#### France

**TR-Electronic France SARL**  
1 Avenue  
Christian Doppler - Bat 2  
FR-77700 Serris  
Tel.: +33/1-64 63 68 68  
Fax: +33/1-61 10 17 66  
info@tr-electronic.fr  
www.tr-electronic.fr

#### Japan

**SANTEST CO. Ltd.**  
1-60 Tsuneyoshi, 1-Chome  
Konohanaku  
J-Osaka 554-8691  
Tel.: +81/6-6465 5561  
Fax: +81/6-6465 5921  
info@santest.co.jp  
www.santest.co.jp

#### Austria

**TR-Electronic GmbH**  
Tragösserstraße 117  
A-8600 Bruck/Mur  
Tel.: +43/3862-55006 0  
Fax: +43/3862-55006 33  
info@tr-electronic.at  
www.tr-electronic.at

#### China

**TR-Electronic (Beijing) CO., Ltd.**  
Room 717 / 718, Building A2  
Electronic City Science Park  
Jiu Xian Qiao Dong Road No. 9  
Chaoyang District  
CN-100027 Beijing, P.R. China  
Tel.: +86/10 - 582 386 55  
Fax: +86/10 - 582 372 10  
lu.yu@tr-electronic.de  
www.tr-electronic.com.cn

#### Great Britain

**TR-Electronic Ltd.**  
4 William House, Old St.  
Michaels Drive  
GB-Braintree Essex CM7 2AA  
Tel.: +44/1 371-876 187  
Fax: +44/1 371-876 287  
info@tr-electronic.co.uk  
www.tr-electronic.co.uk

#### Mexico

**TR Electronic**  
P.O. Box 2543, Station B  
CA-London, Ontario Canada  
N6A 4G9  
Tel.: +1/519-452 1999  
Fax: +1/519-452 1177  
customercare@trelectronic.com  
www.trelectronic.com

**Netherlands**

TR-Electronic Benelux  
Dorpstraat 18C  
NL-5386AM Geffen  
Tel.: +31/73 844 9600  
Mobil: +31/6383 28 303  
rene.verbruggen@tr-electronic.nl  
www.tr-electronic.nl

**Norway**

TR Electronic Sweden AB  
Djupdalsvägen 10  
SE-192 51 Sollentuna  
Tel.: +46/8-756 72 20  
Fax: +46/8-756 76-80  
info@trelectronic.se  
www.trelectronic.se

**Peru**

Grupo C+Tecnologia  
Rua dos Caetés 601  
CEP-05419-000  
BR-Perdizes - São Paulo - SP  
Tel.: +55/11-2168 6554  
Fax: +55/11-2168 6555  
info@ctecnologia.com.br  
www.ctecnologia.com.br

**Poland**

Stoltronic-Polska Sp.z o.o. Sp.k.  
ul. Dąbrowskiego 238  
P-93-231 Łódź  
Tel.: +48/42 649 12 15  
Fax: +48/42 649 11 08  
stoltronic@stoltronic.pl  
www.stoltronic.pl

**Republic of Korea**

MS Intech Co., Ltd.  
B-306 SK Twintech Tower  
345-9 Gasan-dong/  
Geumcheon-gu  
KR-08589 Seoul  
Tel.: +82/2-334 0577  
Fax: +82/2-862 1591  
sales@msintech.com  
www.msintech.com

**Russia**

Sensotek LLC  
Kievskoye highway 22 km  
(Moskovskiy settlement)  
housing estate 4, building 5,  
office 505E  
RU-108811 Moscow  
Tel.: +7/495 181-56-67  
Fax: +7/495 181-56-67  
info@sensotek.ru  
www.sensotek.ru

**Saudi-Arabia**

Business Tribune Company Ltd.  
4237 Ad Danah  
King Abdulaziz Road  
SA-32437-6887 Ad Dammam  
Tel.: +966/3-832 72-17  
Fax: +966/3-832 72-41  
waleed@btc-ksa.com  
www.btc-ksa.com

**Singapore**

Globaltec Electronics  
(Far East) Pte. Ltd.  
50 Bukit Batok Street 23  
#06-27 Midview Building  
SG-659578 Singapore  
Tel.: +65/6267 9188  
Fax: +65/6267 8011  
janice@globaltec.com.sg  
www.globaltec.com.sg

**Slovenia**

S.M.M. d.o.o.  
Jaskova 18  
SI-2001 Maribor  
Tel.: +386/2450 2300  
Fax: +386/2450 2302  
info@smm.si  
www.smm.si

**South Africa**

Angstrom Group (Pty) Ltd.  
Sybrand van Niekerk  
Business Park Meyerton  
19 Tom Muller Road  
ZA-1960 Meyerton  
Tel.: +27/362 0300  
info@angstromeng.co.za  
www.angstromgroup.co.za

**Spain, Portugal**

Intertronic Internacional, SL  
C/Johannes Gutenberg, 4 y 6  
Parque Tecnológico Paterna  
ES-46980 Valencia  
Tel.: +34/963 758 050  
Fax: +34/963 751 022  
info@intertronic.es  
www.intertronic.es

**Sweden**

TR Electronic Sweden AB  
Djupdalsvägen 10  
SE-192 51 Sollentuna  
Tel.: +46/8-756 72 20  
Fax: +46/8-756 76-80  
info@trelectronic.se  
www.trelectronic.se

**Switzerland**

TR-Electronic SA  
14, Ch. Pré-Fleuri  
CH-1228 Plan-les-Ouates/Genève  
Tel.: +41/22-7 94 21 50  
Fax: +41/22-7 94 21 71  
info@tr-electronic.ch  
www.tr-electronic.ch

**Taiwan**

TR-Electronic (Beijing) CO., LTD.  
Room 717 / 718, Building A2  
Electronic City Science Park  
Jiu Xian Qiao Dong Road No. 9  
Chaoyang District  
CN-100027 Beijing, P.R. China  
Tel.: +86/10 - 582 386 55  
Fax: +86/10 - 582 372 10  
lu.yu@tr-electronic.de  
www.tr-electronic.com.cn

**Thailand**

T+R Electronic (Thailand) Co., Ltd.  
120/62 Moo 8 Bang Sare  
TH-Sattahip, Chonburi 20250  
Tel.: +66/38 737 487  
Fax: +66/38 737 171  
trthailand@trelectronic.co.th  
www.trelectronic.co.th

**Turkey**

ÜNİVERSA İÇ ve DIŞ TİC. MAK.  
SAN. LTD. ŞTİ.  
Cemal Gürsel Caddesi No: 11/7  
TR-35600 Karşıyaka-İZMİR  
Tel.: +90/232 382 23 14  
Fax: +90/232 382 23 24  
info@universa.com.tr  
www.universa.com.tr

**USA (TR-Electronic)**

TR Electronic  
200 East Big Beaver Road  
Suite 164  
US-Troy, MI 48083  
Tel.: +1/248-244-2280  
Fax: +1/248-244-2283  
customercare@trelectronic.com  
www.trelectronic.com

**USA (TRsystems)**

TRS Fieldbus Systems, Inc.  
666 Baldwin Court  
US-Birmingham, MI 48009  
Tel.: +1/586 826-9696  
Fax: +1/586 826-9697  
support@trs-fieldbus.com  
www.trs-fieldbus.com

# TR-Electronic – your partner in automation

## Rotary encoders

### Absolute encoder, incremental rotary encoder, wire-actuated encoder

Rotary encoders with optical and magnetic scanning function register the precise position in a wide variety of applications and industries. In medical engineering, miniature versions ensure correct positioning while SIL3-approved absolute rotary encoders provide the necessary safety. We offer not only high-quality rotary encoders (from Ø 22 to 160 mm) for almost any application but also comprehensive accessories.

## Linear encoders

### Linear absolute measuring systems, laser displacement measurement

Linear encoders register linear motions in machines, tools and systems according to specific requirements using different technologies. Linear encoders allow measuring distances of max. 20 m almost without any wear. This value is max. 240 m for laser measuring systems. Machines and systems can be precisely controlled to reach their desired positions.

## Motion

### Compact actuating and positioning drives

Intelligent encoTRive drives are available with the current field bus systems, such as PROFIBUS, PROFINET and CANopen, within a power range of up to 300 watts. The drives are configured to meet customer requirements and can be freely combined with precision gear, holding brake and I/O. Values of up to 4,350 rpm and powerful 200 Nm are available to cope with demanding applications.





## Components

**Industrial PC, field bus I/O,  
PLC, HMI controller**

Industrial PCs are available in numerous variants and offer customized calculation power for PC-assisted automation. Programmable logic controllers (PLC) are the traditional means for automation. HMI controllers establish the interface to the user. Field bus nodes, I/O modules and cam controllers complete the range of automation components.

## Automation

**Consulting and implementation  
for new machines and retrofit**

You want to set up a largely automated new machine or retrofit and modernize your existing machine with automation systems? Then you just need our extensive expert knowledge and the more than 20 years of our experience.

## Unidor

**Blanking and forming,  
systems, controls and sensors**

Trendsetting blanking and forming technology for more than 30 years. We are your reliable partner in the world of blanking and pressing and can prove this with thousands of machines which we have successfully installed all over the world. Sensors, controls and systems ensure optimal results in machines, tools and retrofit projects.



**TR-Electronic GmbH**


Eglishalde 6

D - 78647 Trossingen

Tel. +49 7425 228-0

Fax +49 7425 228-33

info@tr-electronic.de

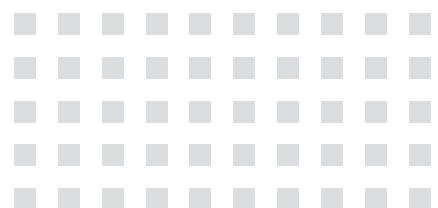[www.tr-electronic.de](http://www.tr-electronic.de)

Last update: 03/2021

68-105-093 · TR-V-PR-GB-0001-12

Subject to technology and design modifications.

Cover photo background: ©kras99-fotolia.com